

# Absolute encoders – singleturn

<b>Standard magnetic</b>	<b>Sendix M5853A (shaft)</b>	<b>SSI</b>
--------------------------	------------------------------	------------



The Sendix M5853A is a magnetic singleturn encoder in compact design. High robustness and high resolution make this encoder the ideal device for use in demanding applications.



### Highest robustness

- Sturdy bearing construction in Safety-Lockplus™ design for particularly high resistance.
- Extra large bearings.
- Mechanically protected shaft seal.
- Wide temperature range -40 °C ... +85 °C.

### Application oriented

- Absolute accuracy  $\pm 1^\circ$ .
- Repeat accuracy  $\pm 0.2^\circ$ .
- Short control cycles, clock frequency with SSI up to 2 MHz.
- Max. resolution 14 bit.

**Order code** 8.M5853A.XX2X.XX12  
**Shaft version** Type

**a** Version

- 3 = clamping flange, IP65,  $\varnothing$  58 mm [2.28"]
- 4 = synchro flange, IP65,  $\varnothing$  58 mm [2.28"]

**b** Shaft ( $\varnothing \times L$ ), with flat

- 1 =  $\varnothing$  6 x 12.5 mm [0.24 x 0.49"]
- 5 =  $\varnothing$  10 x 20 mm [0.39 x 0.79"]

**c** Interface / supply voltage

- 2 = SSI / 10 ... 30 V DC

**d** Type of connection

- 2 = radial cable, 1 m [3.28'] PUR
- B = radial cable, special length PUR \*)
- 4 = radial M12 connector, 8-pin

\*) Available special lengths (connection types B):  
 2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21']  
 order code expansion .XXXX = length in dm  
 ex.: 8.M5853A.352B.G312.0030 (for cable length 3 m)

**e** Code

- B = SSI, binary
- G = SSI, gray

**f** Resolution

- A = 10 bit
- 2 = 12 bit
- 3 = 13 bit
- 4 = 14 bit

Optional on request

- Ex 2/22 (only for connection type 4)

Mounting accessory for shaft encoders		Order no.
<b>Coupling</b>	Bellows coupling $\varnothing$ 19 mm [0.75"] for shaft 10 mm [0.39"]	<b>8.0000.1102.1010</b>
Cables and connectors		Order no.
<b>Preassembled cables</b>	M12 female connector with coupling nut, 8-pin, A coded, straight single ended 2 m [6.56'] PUR cable	<b>05.00.6051.8211.002M</b>
<b>Connector</b>	M12 female connector with coupling nut, 8-pin, A coded, straight (metal)	<b>05.CMB 8181-0</b>

Further Kübler accessories can be found at: [kuebler.com/accessories](http://kuebler.com/accessories)  
 Further Kübler cables and connectors can be found at: [kuebler.com/connection-technology](http://kuebler.com/connection-technology)

# Absolute encoders – singleturn

<b>Standard magnetic</b>	<b>Sendix M5853A (shaft)</b>	<b>SSI</b>
--------------------------	------------------------------	------------

## Technical data

Mechanical characteristics	
<b>Maximum speed</b>	4000 min <sup>-1</sup> 2000 min <sup>-1</sup> (continuous)
<b>Starting torque at 20 °C [68 °F]</b>	< 0.01 Nm
<b>Shaft load capacity</b>	radial 80 N axial 40 N
<b>Weight</b>	approx. 280 g [9.88 oz]
<b>Protection acc. to EN 60529/DIN 40050-9</b>	IP65
<b>Working temperature range</b>	-40 °C ... +85 °C [-40 °F ... +185 °F]
<b>Materials</b>	shaft V2A flange aluminum housing zinc die-cast cable PUR
<b>Shock resistance acc. to EN 60068-2-27</b>	5000 m/s <sup>2</sup> , 4 ms
<b>Vibration resistance acc. to EN 60068-2-6</b>	300 m/s <sup>2</sup> , 10 ... 2000 Hz

Electrical characteristics	
<b>Supply voltage</b>	10 ... 30 V DC
<b>Current consumption (no load)</b>	max. 30 mA
<b>Reverse polarity protection of the supply voltage</b>	yes
<b>Short-circuit proof outputs</b>	yes <sup>1)</sup>

SSI interface	
<b>Output driver</b>	RS485 transceiver type
<b>Permissible load / channel</b>	max. +/- 30 mA
<b>Signal level</b>	HIGH typ 3.8 V LOW with I <sub>Load</sub> = 20 mA typ 1.3 V
<b>Resolution</b>	10 ... 14 bit
<b>Absolute accuracy <sup>2)</sup></b>	±1°
<b>Repeat accuracy</b>	±0.2°
<b>Code</b>	binary or gray
<b>SSI clock rate</b>	50 kHz ... 2 MHz
<b>Data refresh rate</b>	2 ms
<b>Monoflop time</b>	≤ 15 μs
<b>Note:</b> If the clock cycle starts within the monoflop time a second data transfer begins with the same data. If the clock cycle starts after the monoflop time the cycle begins with the new values. The update rate is dependent on the clock speed, data length and monoflop time.	

SET input	
<b>Input</b>	active HIGH
<b>Input type</b>	comparator
<b>Signal level</b> (+V = supply voltage)	HIGH min. 60 % of +V, max: +V LOW max. 30 % of +V
<b>Input current</b>	< 0.5 mA
<b>Min. pulse duration (SET)</b>	10 ms
<b>Input delay</b>	1 ms
<b>New position data readable after</b>	1 ms
<b>Internal processing time</b>	200 ms
<p>The encoder can be set to zero at any position by means of a HIGH signal on the SET input. Other preset values can be factory-programmed. The SET input has a signal processing time of approx. 1 ms, after which the new position data can be read via SSI. Once the SET function has been triggered, the encoder requires an internal processing time of typ. 200 ms; during this time the supply voltage must not be switched off.</p> <p>The SET function should be carried out whilst the encoder is at rest.</p> <p>The number of preset value writing cycles is limited to 10,000.</p> <p>If this input is not used, it should be connected to 0 V (Encoder ground GND) in order to avoid interferences.</p>	

DIR input	
<p>Direction input: A HIGH signal switches the direction of rotation from the default cw to ccw. This inverted function can also be factory-programmed.</p> <p>If this input is not used, it should be connected to 0 V (Encoder ground GND) in order to avoid interferences.</p>	
<b>Response time (DIR input)</b>	1 ms

Power-ON	
<p>After Power-ON the device requires a time of approx. 150 ms before valid data can be read.</p> <p>Hot plugging of the encoder should be avoided.</p>	

Approvals	
<b>UL compliant</b> in accordance with	File no. E224618
<b>CE compliant</b> in accordance with	
EMC Directive	2014/30/EU
RoHS Directive	2011/65/EU
ATEX Directive	2014/34/EU (for Ex 2/22 variants)
<b>UKCA compliant</b> in accordance with	
EMC Regulations	S.I. 2016/1091
RoHS Regulations	S.I. 2012/3032
UKEX Regulations	S.I. 2016/1107 (for Ex 2/22 variants)

1) Short circuit proof to 0 V or to output when supply voltage correctly applied.  
2) Over the whole temperature range.

# Absolute encoders – singleturn

<b>Standard magnetic</b>	<b>Sendix M5853A (shaft)</b>	<b>SSI</b>
--------------------------	------------------------------	------------

## Terminal assignment

Interface	Type of connection	Features	Cable (isolate unused cores individually before initial start-up)									
			Signal:	0 V	+V	C+	C-	D+	D-	SET	DIR	⊥
2	2, B	SET, DIR	Core color:	WH	BN	GN	YE	GY	PK	BU	RD	shield

Interface	Type of connection	Features	M12 connector, 8-pin									
			Signal:	0 V	+V	C+	C-	D+	D-	SET	DIR	⊥
2	4	SET, DIR	Pin:	1	2	3	4	5	6	7	8	PH

- +V: Supply voltage encoder +V DC
- 0 V: Supply voltage encoder ground GND (0 V)
- C+, C-: Clock signal
- D+, D-: Data signal
- SET: Set input
- DIR: Direction input
- PH ⊥: Plug connector housing (shield)

Top view of mating side, male contact base



M12 connector, 8-pin



## Dimensions

Dimensions in mm [inch]

### Clamping flange, ø 58 [2.28] Flange type 3

- 1 3 x M4
- 2 3 x M3

D	Fit	L
6 [0.24]	h7	12.5 [0.49]
10 [0.39]	h7	20 [0.79]

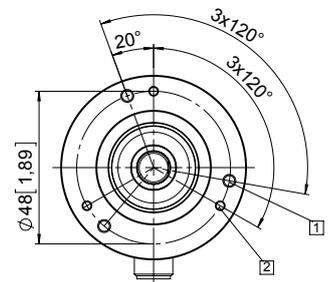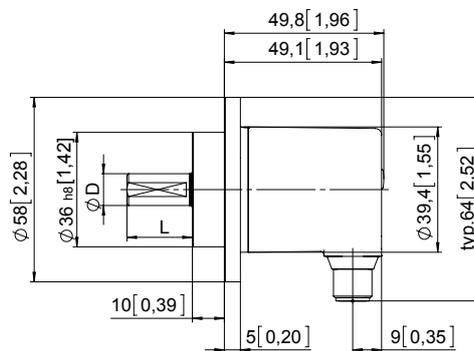

### Synchro flange, ø 58 [2.28] Flange type 4

- 1 3 x M4, 10 [0.39] deep

D	Fit	L
6 [0.24]	h7	12.5 [0.49]
10 [0.39]	h7	20 [0.79]

