

Incremental encoders

Heavy Duty shaft, optical

Sendix Heavy Duty H100 (shaft)

Push-pull / RS422 / speed switch



The Sendix Heavy Duty encoder H100 is an extremely rugged incremental encoder available in 3 versions: encoder with or without speed switch and double encoder.

Thanks to the special HD-Safety-Lock™ construction it is ideally suited for applications in heavy industry, such as steel works and cranes. Resistant materials, wide temperature ranges and a high protection level ensure it remains unaffected by the harshest environmental conditions. Its innovative connection technology enables simple quick installation.



HD-Safety-Lock™



High rotational speed



Temperature range



IP66



Shock/vibration resistant



Magnetic field proof



Plug-in cage-clamp connectors



Spring terminal connectors



Reverse polarity protection



Optical sensor



Seawater durable

Suitable for your Heavy Duty application

- HD-Safety-Lock™ bearing construction for an extremely high bearing load capacity of up to 300 N axial and 400 N radial.
- With a temperature range from -40 °C up to +100 °C, IP66 protection and seawater durable material the encoder is resistant to harsh environmental conditions.
- Feather key shaft slot ensures positive fitting to the application.
- Safe overspeed protection by means of mechanical speed switch.

Simple quick installation

- Innovative plug-in spring terminal connectors in the terminal box greatly simplify the cable connection and offer a very high level of safety.
- Various connection possibilities thanks to terminal box being rotatable through 180°.
- Large number of resolution and switching speed options available as standard.

Order code without speed switch

8.H100 . 1 | 1 | 1 | X | . XXXX

Type

a Flange

1 = Euro RE0444

d Output circuit / supply voltage

1 = RS422 (with inverted signal) / 5 ... 30 V DC

Optional on request

- other pulse rates

- Ex 2/22

b Shaft ($\varnothing \times L$), with feather key shaft slot

1 = $\varnothing 11 \times 30$ mm [0.43 x 1.18"]

e Pulse rate

1, 5, 10, 12, 36, 100, 200, 250, 256, 360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 2000, 2048, 2500, 3600, 4096, 5000
(e.g. 100 pulse => 0100)

c Version

1 = incremental encoder

Order code with speed switch

8.H100 . 1 | 1 | 2 | X | . XXXX | . XXXX | . 1

Type

a Flange

1 = Euro RE0444

d Output circuit / supply voltage

1 = RS422 (with inverted signal) / 5 ... 30 V DC

f Switching speed

750, 1000, 2000, 3000, 4000

b Shaft ($\varnothing \times L$), with feather key shaft slot

1 = $\varnothing 11 \times 30$ mm [0.43 x 1.18"]

e Pulse rate

1, 5, 10, 12, 36, 100, 200, 250, 256, 360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 2000, 2048, 2500, 3600, 4096, 5000
(e.g. 100 pulse => 0100)

g Switching accuracy

1 = standard ($\pm 4\%$ at 100 rad/s 2)

c Version

2 = incremental encoder
with mech. speed switch

Optional on request

- other pulse rates

- other switching speeds

- other switching accuracies

- Ex 2/22

Incremental encoders

Heavy Duty shaft, optical	Sendix Heavy Duty H100 (shaft)	Push-pull / RS422 / speed switch
Order code double encoder	8.H100 . 1 1 3 X . XXXX . XXXX Type a b c d e f	
a Flange 1 = Euro RE0444	d Output circuit / supply voltage 1 = RS422 (with inverted signal) / 5 ... 30 V DC 2 = Push-pull (with inverted signal) / 10 ... 30 V DC	f Pulse rate encoder 2 1, 5, 10, 12, 36, 100, 200, 250, 256, 360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 2000, 2048, 2500, 3600, 4096, 5000 (e.g. 100 pulse => 0100)
b Shaft ($\varnothing \times L$), with feather key shaft slot 1 = $\varnothing 11 \times 30$ mm [0.43 x 1.18"]	e Pulse rate encoder 1 1, 5, 10, 12, 36, 100, 200, 250, 256, 360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 2000, 2048, 2500, 3600, 4096, 5000 (e.g. 100 pulse => 0100)	<i>Optional on request</i> - other pulse rates - Ex 2/22
c Version 3 = 2 x incremental encoder		

Mounting	Order no.
Coupling	8.0000.1L01.1112
Accessories – connecting cable	Order no.
For encoder	8.0000.6400.XXXX¹⁾
For speed switch	8.0000.6600.XXXX¹⁾

Technical data			
Mechanical characteristics		Electrical characteristics	
Maximum speed	6000 min ⁻¹		
Starting torque with seal – at 20 °C [68 °F]	~ 2 Ncm		
Load capacity of shaft	radial 400 N axial 300 N		
Weight	H100 ~ 1.8 kg [63.49 oz] H100 + speed switch ~ 2.7 kg [95.24 oz]		
Protection acc. to EN 60529	IP66		
Working temperature range (surface of housing)	-40 °C ... +100 °C [-40 °F ... +212 °F]		
Materials	shaft stainless steel housing aluminum die-cast (EN AC-44300), seawater durable coating flange seawater durable aluminum type Al Si Mg Mn (EN AW-6082)		
Shock resistance acc. to EN 60068-2-27	3000 m/s ² (1 ms)		
Vibration resistance acc. to EN 60068-2-27	without speed switch 100 m/s ² , 10 ... 2000 Hz with speed switch, switching speed > 1000 100 m/s ² , 10 ... 400 Hz with speed switch, switching speed < 1000 50 m/s ² , 10 ... 400 Hz		

Approvals		
CE compliant in accordance with		
EMC Directive	2014/30/EU	
RoHS Directive	2011/65/EU	
ATEX Directive	2014/34/EU (for Ex 2/22 variants)	
UKCA compliant in accordance with		
EMC Regulations	S.I. 2016/1091	
RoHS Regulations	S.I. 2012/3032	
UKEX Regulations	UKEX 2016/1107 (for Ex 2/22 variants)	

1) XXXX = cable length in meters.
2) If supply voltage +V correctly applied.
3) Only one channel allowed to be shorted-out:
At +V short circuit to channel or 0 V is permitted.

Incremental encoders

Heavy Duty shaft, optical	Sendix Heavy Duty H100 (shaft)	Push-pull / RS422 / speed switch														
Speed switch <table border="1"> <tr> <td>Switching speed (ns)</td><td>750 ... 4000 min⁻¹</td></tr> <tr> <td>Max. rotational speed (mechanical)</td><td>1.25 x ns</td></tr> <tr> <td>Switching accuracy</td><td>±4 % of ns</td></tr> <tr> <td>with acceleration $\alpha = 100 \text{ rad/s}^2$ (corresponds $\Delta n = 955 \text{ min}^{-1}/\text{s}$)</td><td></td></tr> <tr> <td>Switching difference cw/ccw rotation</td><td>~ 3 %</td></tr> <tr> <td>Switching hysteresis (Xd)</td><td>~ 40 % up to 80 % of ns</td></tr> <tr> <td>Switching capacity</td><td>3 A / max. 50 V AC 1 A / max. 75 V DC</td></tr> </table>	Switching speed (ns)	750 ... 4000 min ⁻¹	Max. rotational speed (mechanical)	1.25 x ns	Switching accuracy	±4 % of ns	with acceleration $\alpha = 100 \text{ rad/s}^2$ (corresponds $\Delta n = 955 \text{ min}^{-1}/\text{s}$)		Switching difference cw/ccw rotation	~ 3 %	Switching hysteresis (Xd)	~ 40 % up to 80 % of ns	Switching capacity	3 A / max. 50 V AC 1 A / max. 75 V DC		Definition switching hysteresis (Xd)
Switching speed (ns)	750 ... 4000 min ⁻¹															
Max. rotational speed (mechanical)	1.25 x ns															
Switching accuracy	±4 % of ns															
with acceleration $\alpha = 100 \text{ rad/s}^2$ (corresponds $\Delta n = 955 \text{ min}^{-1}/\text{s}$)																
Switching difference cw/ccw rotation	~ 3 %															
Switching hysteresis (Xd)	~ 40 % up to 80 % of ns															
Switching capacity	3 A / max. 50 V AC 1 A / max. 75 V DC															

(more details see manual)


SP = switching point (for switching speed ns)

RSP = reset point


Xd = switching difference (hysteresis)

Terminal assignment terminal connections

Incremental encoders




- B incremental track B
- A incremental track A
- 0 V
- + +V
- PE shield




- 0 incremental track 0
- Ā incremental track Ā
- B̄ incremental track B̄
- 0̄ incremental track 0̄

Speed switch



- 4, 1 normally open (NO)
- 3, 2 normally closed (NC)
- PE shield

Jumper

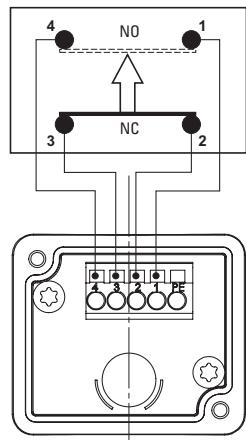

Incremental encoders

Heavy Duty shaft, optical

Sendix Heavy Duty H100 (shaft)


Push-pull / RS422 / speed switch

Dimensions

Dimensions in mm [inch]

Incremental encoder Version 1

- ① Feather key acc. to ISO 773
4 x 4 x 20 [0.16 x 0.16 x 0.79]

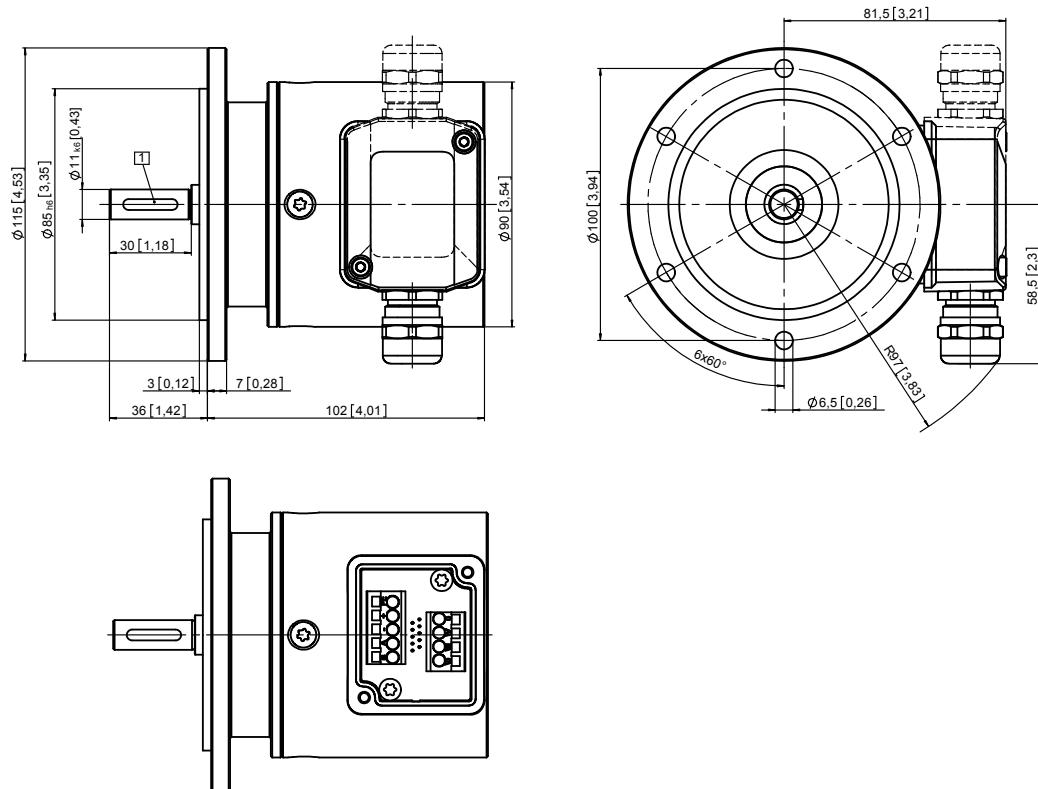

Incremental encoders

**Heavy Duty
shaft, optical**

Sendix Heavy Duty H100 (shaft)

Push-pull / RS422 / speed switch

Dimensions

Dimensions in mm [inch]

Incremental encoder with mechanical speed switch or 2 x incremental encoder (double encoder)

Version 2 or 3

- ① Feather key acc. to ISO 773
4 x 4 x 20 [0.16 x 0.16 x 0.79]

